




SPECIFICATION APPROVAL
(General Specification)

(Item)		(Specification)
1	(Model)	RQA12038HBL
2	(Outline)	120*120*38
3	(Rated Voltage)	220V
4	(Rated Current)	0.14A
5	(Rated Power)	21W
6	(Speed)	2600RPM±10%
7	(Fan Blade)	5PCS
8	(Max Air Flow)	80CFM±10%
9	(Noise Level)	45DBA
10	(Bearing)	BALL
11		
12		

Test Result) : Appearance Inspection and operation normally)



RQA120×120×38mm

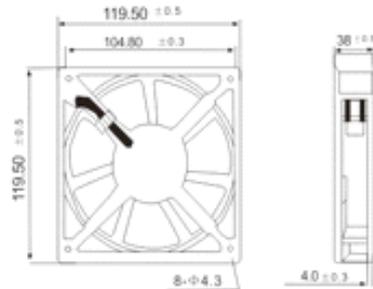


Model	Voltage	Frequency	Current	Power	Air Volum	Speed	Noise Level
	(V)	(HZ)	(A)	(W)	(CFM)	(RPM)	(db)
RQA12038HBL	110	50/60	0.24/0.23	22/21	90/100	2600/3000	42/44
RQA12038HBL	220	50/60	0.14/0.13	22/21	90/100	2600/3000	42/44
RQA12038HSL	110	50/60	0.24/0.23	22/21	90/100	2600/3000	42/44
RQA12038HSL	220	50/60	0.14/0.13	22/21	90/100	2600/3000	42/44
RQA12038HSL	380	50/60	0.07/0.06	22/21	90/100	2600/3000	42/44
RQA12038HS(B)L	110/220	50/60	0.14/0.23	22/21	90/100	2600/3000	42/44

**FK7722****型号 Model**


风扇及过滤器
Fan and filter
FK 7722....




进风过滤器
Air-in filter
FK 7722.230




出风过滤器
Air-out filter
FK 7722.300



安装剖面
Mounting profile
FK 7722....



功率特性曲线
Power characteristic curve
FK 7722....

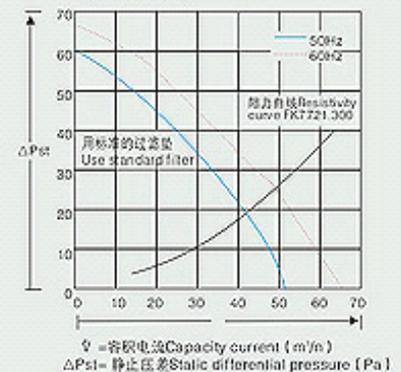

型号 Model	FK7722.230	FK7722.115	FK7722.024
额定工作电压 伏/赫 Rated working voltage V/Hz	230/50/60	115/50/60	24(直流)DC
空气流量, 自由吹风 Air supply Free air blowing	55/66m ³ /h		
空气流量 配出口过滤器包括标准过滤垫 Air supply Equipped with exporting filter Include standard filtering pad	1 × FK7722.300:43/50m ³ /h 2 × FK7722.300:48/55m ³ /h		
轴流风扇 Axial fan	自启动屏蔽磁极电动机 Auto-starting shielded-pole motor		直流电动机 DC motor
额定电流 Rated current	0.12安 A 0.11安 A	0.24安 A 0.23安 A	0.15安 A
功率 Power	19瓦W/18瓦W	19瓦W/18瓦W	3.5瓦W
噪声水平 Noise level	46/49dB(安)		